

TRENCH'N edgeTM

Rotary Trencher

The ONLY Trencher



that cleans up after itself

Eliminate the high cost of clean-up by blowing material directly onto tarps.



Dual-side discharge into or out of bed so material won't ruin existing lawns or planting beds.



No clean-up costs means increased profits and happy customers.

For Smooth Curves and Less Work, Call 800-4-T-EDGER, (800-483-3437).

For the Edge, Inc., 8028 Hill Trail North, Lake Elmo, MN 55042-9534

Phone (651) 777-7923,

Fax (651) 770-9430

www.trenchnedge.com

US Patent Number US05964049

Dual Side Discharge

Trench for: waterlines

- sprinkler systems
- drain tile
- lighting cable
- landscape walls
- footings for garages
- pruning roots and edging (plastic, brick, rock, concrete, etc.)



Dual side discharge, sends soil into or out of flower bed, from either direction



Low Maintenance Costs With:



Replaceable Cutting Teeth


Safety First
Cutting Blades and Belt enclosed in steel housings




Adjustable Depth

Easily Adjustable
Depth from 0" to 9"
Depth - Crank it down to the desired Depth-
Each Turn 1/2"

Retractable Blade

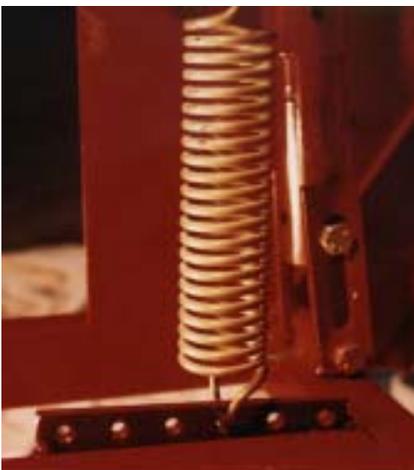

Avoid the "dark side" of portable trenching with our new floating cutting head The Rock-E-Vader™ is a spring-loaded cutting head with carbide-tipped frost points. The cutting head can retract and lift over most large obstructions (rocks, roots, etc.). This feature reduces repair and maintenance costs that fixed head trenchers can't match.

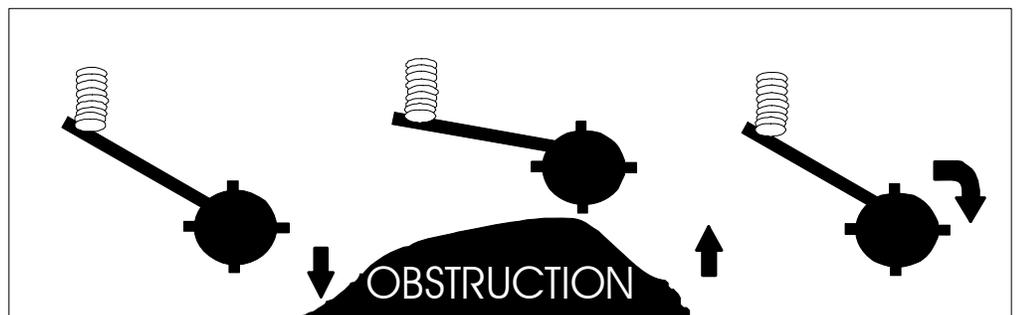

Steerable front wheel



Allows for tight turns and curves and the ability to cut small diameter tree rings down to 18" diameter.



Wide Trenches Up to 4'

Brick Edging, retaining walls, natural stone, brick edging pathways



Bed edging and Brick edging



The **TRENCH'N edge Rotary Trencher** cuts a clean uniform flat bottom trench that fits SELECTedge™ Landscape Border Stones and other concrete and brick edging reducing installation time and labor.



The TRENCH'N edge is the only portable trencher to have all of these unique features:

- Blows the trenched material onto tarps - to reduce clean-up labor.
- Steerable front pivot wheel.
- Cuts small-diameter tree rings-- as tight as 18" diameter.
- No need to buy multiple blades for each depth and width.
- Can cut a double-wide trench -- up to 10" wide or flip the wheels to the outside to cut up to 18" wide.
- Material can discharge on either side of machine for increased flexibility and reduced cleanup.
- 9 HP Honda engine to cut through tough clays and rocky soils.
- Cutting wheel centered between the rear wheels for a uniform trench during tight radiuses.
- Narrow machine design to allow closer cuts to existing flower beds and foundations.
- Trencher teeth are replaceable carbide tip frost points.
- Spring loaded retractable cutting blade to reduce maintenance costs.
- Square bed edging to remove more soil from the bed to allow for extra rock and mulch.
- All blades and belts enclosed in steel housing for operator safety.
- Portable compact design for easy loading in minivans and pickups.
- Trench waterlines, sprinkler systems, lighting cable, drain tile, landscape walls, and edging (plastic, brick, rock, and modular concrete, etc.).

Specifications

Dear TRENCH'N edge Trencher,

"The TRENCH 'N edge Trencher is a god send. Do to my oldest daughter's graduation open house, we had to cut and install 450 feet of Selectedge (modular brick edging) in-one day. The trencher cut a clean trench and blew the dirt directly onto tarps so we didn't ruin our lawn or mulched flower beds. What we thought would be a 2 weekend installation took only one day. Thank you for your truly amazing machine!"

Scott & Betsy Kaercher
Homeowner

Engine:	9 HP Honda
Landscape trencher cut:	Up to 5" wide x 6" deep
Irrigation trencher cut:	Up to 2.5" wide x 9" deep
Speed:	Up to 25 feet per minute, varies with ground conditions
Discharge:	Dual side: displaced soil can be discharged into or out of a bed, on either side of machine
Drive:	Double V-belt with Idler Clutch from engine to rotor and optional 3" centrifical clutch available
Trencher Teeth:	Up to 8 replaceable Carbide Bits mounted in forged steel holdders
Service Parts:	Standard components may be obtained locally
Dimensions:	60" long x 25" wide x 30" high
Weight:	225#
Shipping:	58" x 25" x 30", 25.3 cubic feet, 275#
Assembly:	Fully Assembled from Factory

For Smooth Curves and Less Work, Call 800-4-T-EDGER, (800-483-3437).
For the Edge, Inc., 8028 Hill Trail North, Lake Elmo, MN 55042-9534
Phone (651) 777-7923, Fax (651) 770-9430 www.trenchnedge.com
US Patent Number US05964049