

MOUNTING:

STEM MOUNT
OPTIONAL SPIKE MOUNT
OPTIONAL FLOOR MOUNT
OPTIONAL CONDUIT MOUNT

MATERIALS

TOP/STEM: COPPER

LAMP

LO912 11.8 WATT
T-5 WEDGE BASE

LAMP REPLACEMENT:


REMOVE FIXTURE TOP FROM STEM
BY TURNING COUNTER-CLOCKWISE,
HOLD SOCKET, PULL THE LAMP STRAIGHT OUT,
REPLACE WITH NEW LAMP,
REPLACE TOP OF FIXTURE BY TURNING CLOCKWISE

FINISH:

GD-7520CU NATURAL COPPER
GD-7520CU-V COPPER VERDE (ADDITIONAL CHARGE)
GD-7520CU -1 (BLACK), -7 (WEATHERED IRON)
(STANDARD POLYESTER POWDER COAT)
GD-7520CU -2 (NATIVE GREEN), -3 (TAN), -4 (BRONZE),
-8 (SANDSTONE), -9 (EARTHTONE), -W (WHITE),
-AV (ANTIQUÉ VERDE), -VP (VERDE POWDER)
(OPTIONAL POLYESTER POWDER COAT:
ADDITIONAL CHARGE)

SOCKET:

NON-CORRODING NORYL (WEDGE BASE)

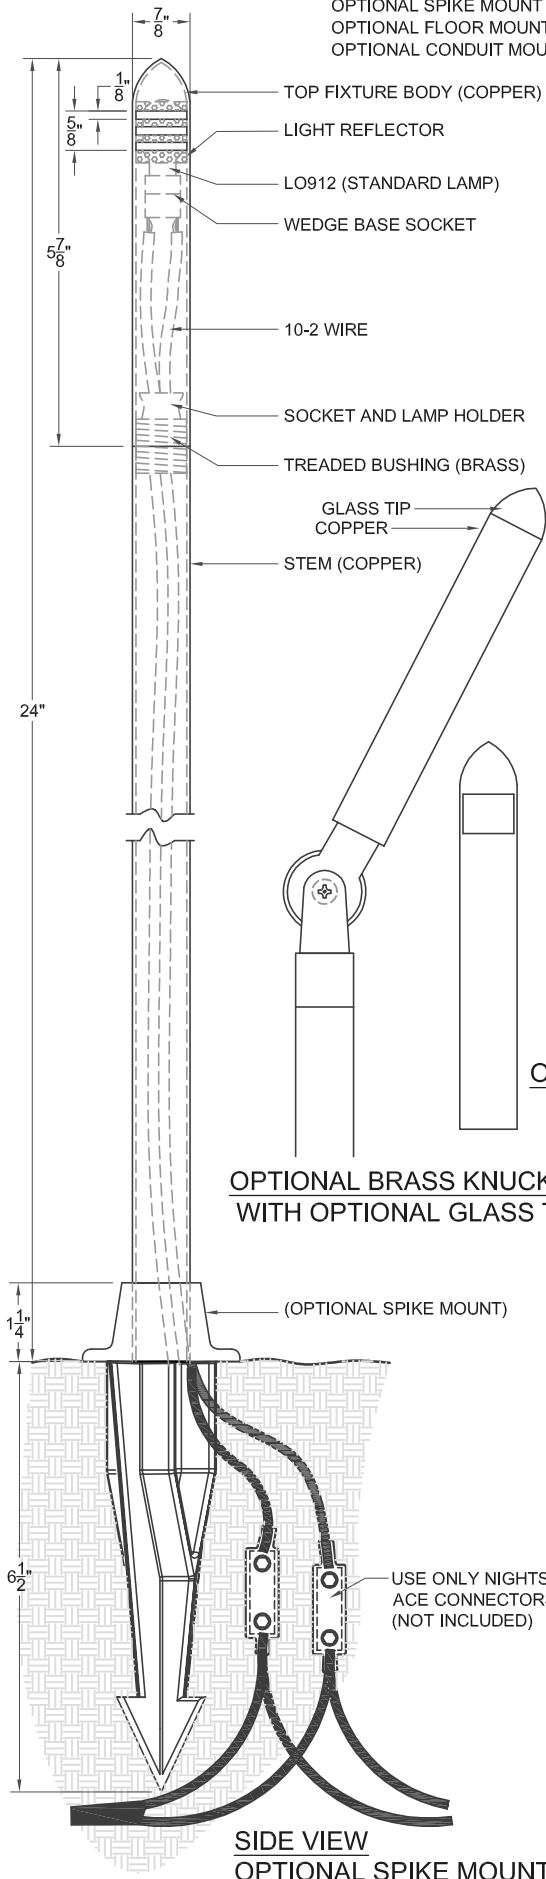

OPTIONAL HORIZONTAL 360° SLOTS

OPTIONAL VERTICAL SLOTS

OPTIONAL HALF GLASS TOP

OPTIONAL BRASS KNUCKLE
WITH OPTIONAL GLASS TIP

FLOOR MOUNT
(OPTIONAL)

CONDUIT MOUNT, 7/8" MALE
THREADS (OPTIONAL)

FRONT VIEW (STANDARD)
STEM MOUNT DIRECT BURIAL

SIDE VIEW
OPTIONAL SPIKE MOUNT

SEEGARLITER GD-7520CU

Nightscaping®

SIZE
A

DRAWN BY
HECTOR CARRILLO

CLASSIFICATION
PATHLIGHTING

DATE
DECEMBER 18, 2006